




32Amp 230V

Switched PDU

Model Number
IPSWV-39213-3209

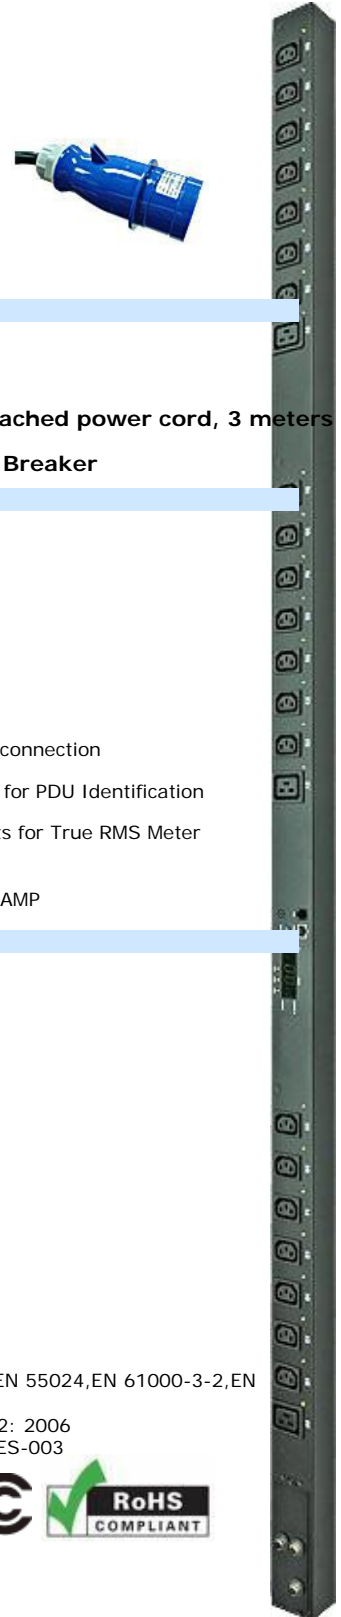

- Meter** True RMS Current Meter,
- Power Monitor** Total Power Monitoring by Meter, Web, SNMP, Free Bundle Software
- Protocols** Http, Https, SNMP, DHCP, UDP, SSL(verified by IE6 on WinXP)
- Outlet Control** Individual,
- Power Delay** Power On/Off Sequence can be Defined
- Alarm Thresholds** User-Defined Alarm Thresholds for Warning and Overload
- Event Alert** Email, Trap, Audible Alarm
- Temp./Humidity** Option Accessory

General	
Output	(21) IEC320 C13 (3) IEC320 C19
Input	(1) IEC320 309 attached power cord, 3 meters long
Protection	(3) 16 AMP Circuit Breaker
Communication	
SSL Indication	(1) Yellow LED
DHCP Indication	(1) Green LED
Circuit Status	(3) Red LED
Output Status	(24) Green LED
Network	(1) RJ45 for Ethernet
Temp./Humidity	(1) RJ11 for ENV probe connection
PDU ID	1 Digits Seven Segment for PDU Identification
Current Meter	3 Digits Seven Segments for True RMS Meter Range: 0A ~ 20 A Resolution: 0.1A Precision: +/-2%/+/-0.1AMP

Operation	
Nominal Voltage	230V
Voltage	200V ~ 240V full range
Frequency	50/60HZ full range
Max. Output Current	32 Amp
Temperature	0 ~ 40 Celsius degree
Humidity	0% ~ 90%
Size	56 x 1778 x 44 mm
Weight	6 kg

Regulatory Approvals
 CE, EN 55022 Class A, EN 55024, EN 61000-3-2, EN 61000-3-3
 C-Tick AS/NZS CISPR 22: 2006
 FCC Part 15 Class A, ICES-003

