



16Amp 230V

Switched PDU

Model Number
IPSWB-1308-1620



Meter True RMS Current Meter, Voltage, Frequency, Power Factor, Active Power, Apparent Power, Total kWh, Sub-total kWh.

Power Monitor Total Power Monitoring by Meter, Web, SNMP, Free Bundle Software

Protocols Http, Https, SNMP, DHCP, UDP, SSL(verified by IE6 on WinXP)


Outlet Control Individual, Group, Schedule, Auto Ping

Power Delay Power On/Off Sequence can be Defined

Alarm Thresholds User-Defined Alarm Thresholds for Warning and Overload

Event Alert Email, Trap, Audible Alarm

Temp./Humidity Option Accessory

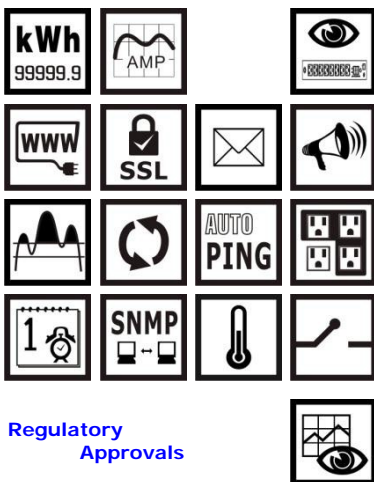

Regulatory Approvals



General	
Output	(8) IEC320 C13
Input	(1) IEC320 C20 Inlet; Enclosed IEC320 C19 to C20 Power Cord 3 Meters long
Protection	(1) 16 AMP Circuit Breaker
Communication	
SSL Indication	(1) Yellow LED
DHCP Indication	(1) Green LED
Output Status	(8) Green LED
Circuit Status	(1) Red LED
Network	(1) RJ45 for Ethernet
Temp./Humidity	(1) RJ11 for ENV probe connection
PDU ID	1 Digits Seven Segments for PDU Identification
Meter	3 Digits Seven Segments
Power Information	
Voltage	+/- 2% @ 90V~260V
Active Power	+/- 2% @ 50W~5000W
Apparent Power	+/- 2% @ 50VA~5000VA
Frequency	+/- 2% @ 45~65Hz
Power Factor	+/- 0.02 @ 0.5~1.0
kWh	Range: 0.001kWh ~ 99999.999kWh Precision: +/-2% @ 50W~5000W, kh=1.0
Current	Range: 0A ~ 20 A Resolution: 0.1A Precision: +/-2%/+/-0.1AMP
Operation	
Nominal Input Voltage	230V
Output Voltage	200V~ 240V full range
Frequency	50/60HZ full range
Max. Output Current	16 Amp
Temperature	0 ~ 40 Celsius degree
Humidity	0% ~ 90%
Size	125 x 432 x 44.45 mm
Net Weight	2.5 kg