




32Amp 230V

Monitored PDU

Model Number
IPMTJ-1402-032

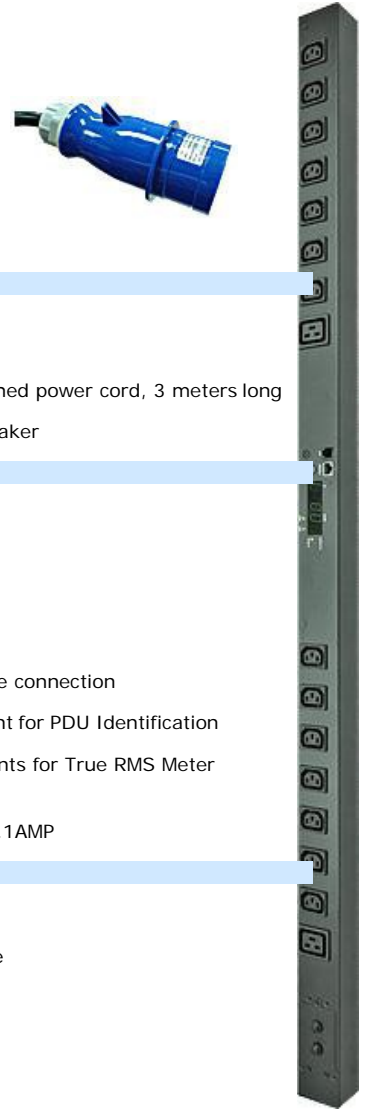

- Meter** True RMS Current Meter,
- Power Monitor** Total Power Monitoring by Meter, Web, SNMP, Free Bundle Software
- Protocols** Http, Https, SNMP, DHCP, UDP, SSL(verified by IE6 on WinXP)
- Alarm Thresholds** User-Defined Alarm Thresholds for Warning and Overload
- Event Alert** Email, Trap, Audible Alarm
- Temp./Humidity** Option Accessory

General

Output	(14) IEC 320 C13 (2) IEC 320 C19
Input	(1) IEC 320 309 attached power cord, 3 meters long
Protection	(2) 16 AMP Circuit Breaker

Communication

SSL Indication	(1) Yellow LED
DHCP Indication	(1) Green LED
Circuit Status	(2) Red LED
Network	(1) RJ45 for Ethernet
Temp./Humidity	(1) RJ11 for ENV probe connection
PDU ID	1 Digits Seven Segment for PDU Identification
Current Meter	3 Digits Seven Segments for True RMS Meter Range: 0A ~ 20 A Resolution: 0.1A Precision: +/-2%+/-0.1AMP

Operation

Nominal Voltage	230V
Voltage	200V ~ 240V full range
Frequency	50/60HZ full range
Max. Output Current	32 Amp
Temperature	0 ~ 40 Celsius degree
Humidity	0% ~ 90%
Size	56 x 1245 x 44 mm
Weight	4 kg

Regulatory Approvals
 CE, EN 55022 Class A, EN 55024, EN 61000-3-2, EN 61000-3-3
 FCC Part 15 Class A, ICES-003

